

# SMARTLIFT™ WIDE

## 2 POST INGROUND LIFT SERIES WITH AV ARMS

### THE ONE INGROUND LIFT TO SERVICE THEM ALL

Rotary's WIDE SMARTLIFT is now even more versatile!

It's the perfect combination for EVs,  
Low Profile Exotics, Unibody  
Designs and even Light Trucks.\*

## SIMPLY LIFTS EVERYTHING

The WIDE SMARTLIFT / AV ARM  
combination provides the versatility shops  
needs to lift every type of vehicle on ONE LIFT!



**SLW212-AV**  
12,000 LBS. CAPACITY LIFTS



Model shown: **SLW212IN20M0BK**



**SLW210-AV**  
10,000 LBS. CAPACITY LIFTS



Model shown: **SLW210IN20M0BK**

### Highest Capacity Low-Profile Lifts Available

#### LIFTS INCLUDE

Truck adapters, Round adapters with 3-1/2" & 5" extensions

**Ultimate Arm Positioning** with the shortest arm retraction in the market by up to 2-7/8"

**Easy Adapter Spotting & Positioning** with the lowest adapter height on inground in NSA

**Available with Shockwave Power** for 2X Lifting Speed!

\*Within the lift's rated capacity. Low-profile exotics capability may be limited to the SLW210-AV.

PROUDLY MADE IN MADISON, INDIANA

ENVIRONMENTALLY-FRIENDLY 

# SMARTLIFT™ WIDE WITH AV ARMS

## THE INDUSTRY'S BEST ACCESS AND CLEARANCE

Shops get the **48% MORE UNOBSTRUCTED UNDER CAR ACCESS** and the **LOWEST INGROUND LIFT ADAPTER HEIGHT** on the market.



## INTERCHANGEABLE ADAPTER OPTIONS

The **WIDE SMARTLIFT with AV ARMS** comes with all the adapters a tech needs to get lifting "right out of the box!"

## THE ULTIMATE IN LIFTING VERSATILITY

Simplify your shop and give techs the flexibility and clearance needed to service any vehicle.



**RA Round Adapters**

Round, padded RA polymer adapters thread-up for additional positioning.



**TA Truck Adapters**

Frame-engaging polymer adapters thread-up for additional reach.

Four (4) 3.5" and four (4) 5" stackable adapter inserts are standard



## HOW DO WE MEASURE UP?

### SLW210-AV

**10% GREATER ARM SWEEP**

**15% LOWER ADAPTER HEIGHT**



### SLW212-AV


**9% GREATER ARM SWEEP**

**18% LOWER ADAPTER HEIGHT**



## MAXIMIZE YOUR SERVICE OPTIONS BY GOING WIDE

Future-proof your business with the **WIDE SMARTLIFT® – 1.5X WIDER & 2X FASTER\*** than standard lifts!

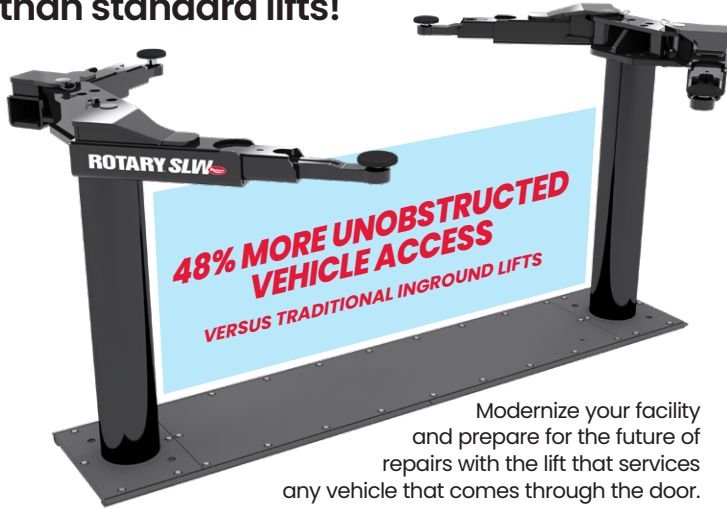

Modernize your facility and prepare for the future of repairs with the lift that services any vehicle that comes through the door.

### Technicians Are More Productive:

**Rotary wide inground lifts provide 360° movement around the vehicle and unobstructed access above and below the vehicle.**

The wide superstructure creates nearly 50% more under-vehicle space. Repairs can be performed without danger of damaging the vehicle on lift columns or overheads.

## FEATURES DESIGNED FOR HIGHER PROFITS

Get the most from your service facility and see bigger savings over the life of your shop lifts.

From every angle, we've designed the SmartLift to help you get the most from your service facility.



LEARN ABOUT THE SMARTLIFT ADVANTAGE

## EXCLUSIVE EASY-MAINTENANCE SYSTEM

**Required Routine Service is Faster and Less Expensive\***

- Patented Easy Access™ cylinders allow all routine cylinder maintenance to be done at floor level with no forklifts. **Reduce downtime by 75%** and preserve bay revenue with lower service repair costs.
- Exclusive Smartguard® plungers for time tested durability and performance.
- Corrosion resistant locking system features a patent polymer and stainless air cylinder for high performance and longevity of lift operation.

### Environmental Responsibility

Smartlifts are fully contained in a recycled, single-piece polymer composite housing – oil leakage and spillage are a thing of the past. **There are no EPA concerns with this inground lift.**

### Easier, Faster Installation

Smartlifts are preassembled and install quickly in a new or existing facility with minimal excavation. Smartlifts require less materials versus other wide stance lifts that need multiple pours, more assembly and longer time to complete installation. **Save up to 35% in installation costs.\***

### More Up Time, Less Lost Revenue

No other lift brand rigorously life cycle tests its equipment to the same standards as Rotary. Testing validates components, minimizes lift failures and maximizes working time in the bay – matching years of reliable service.

\*WHEN COMPARED TO COMPETITIVE DESIGNS

## SHOCKWAVE™ TECHNOLOGY



**Accelerate service numbers with 2X the lifting speed compared to standard lifts!**

Designed specifically for bays where service speed is essential, Shockwave helps you keep step with the ever changing demands in the vehicle service industry.

### Supercharge with SHOCKWAVE™

Every industry exclusive SHOCKWAVE-equipped lift includes:

- 2X faster rise and descent
- Patented 110v DC power system with built-in battery charger
- Spotline™ laser-assisted spotting with motion sensor



LEARN ABOUT THE BENEFITS OF SHOCKWAVE LIFTS

\*WITH SHOCKWAVE-EQUIPPED LIFTING POWER.

# ROTARY<sup>®</sup>

BY ROTARY SOLUTIONS

## SLW-AV INGROUND LIFTS

### SPECIFICATIONS:

MODELS	SLW210M	SLW212M
STANDARD POWER	SLW210iN20MO	SLW212iN20MO
SHOCKWAVE EQUIPPED	SLW210U20MO	SLW212U20MO
<b>Lift Capacity</b>	10,000 lbs.	12,000 lbs.
<b>Max. Rise* 71" cylinder stroke</b>	75-3/16" to 76-3/8"	75-9/16" to 76-3/4"
<b>Overall Width</b>	119-5/8"	
<b>Drive-Thru Clearance</b>	88-1/16"	
<b>Minimum Arm Reach</b>	16-11/16"	19-1/8"
<b>Maximum Arm Reach</b>	44-1/2"	47"
<b>Minimum Adapter Height from Floor</b>	RA ADAPTER: 3-7/8" TA ADAPTER: 4-1/8"	
<b>Ceiling Height Minimum</b>	Required ceiling height equals rise with tallest adapter extensions plus height of vehicle	
<b>Voltage Single Phase</b>	208-230V <b>110V with SHOCKWAVE</b>	
<b>Electrical Usage Ø</b>	.01kWh per cycle	
<b>Guide Plunger Diameter</b>	8-1/2"	
<b>Time of Full Rise / Descent With SHOCKWAVE**</b>	53 seconds / 24 seconds <b>25 seconds / 19 seconds</b>	

\* Rise measures the highest position of the adjustable adapters with use of supplied adapter extensions from floor to full cylinder stroke.

\*\*Actual rise and descent times vary depending on vehicle weight. Heights and widths reflect standard settings.

Standard Colors are Blue, Red, Black

### OPERATING CONTROLS / POWER UNIT CONFIGURATIONS INTEGRATED BENCH CONTROLS\*

- Improve your facility's image with an open and clear floor.
- Increase technician efficiency with the ease of use.
- Available for conventional and SHOCKWAVE-equipped lifts.

### SINGLE TOUCH CONTROL with Liquid Detection System

- Raising and lowering the lift is simplified with a single button.
- The lift can be lowered and the safety locks disengaged with one finger.

### CONVENTIONAL CONTROLS

- Efficient and easy to use, power units feature a heavy-duty electric motor with single up button switch and a single lowering valve release handle.

### WALL-MOUNTED OR PEDESTAL STAND CONFIGURATIONS\*

Options are available for conventional, one-touch, and SHOCKWAVE-equipped lifts.

\*Contact Rotary for details.

## LT35A LIFT TABLE

### AIR-HYDRAULIC LIFT TABLE

3,500 lb. Capacity



SCAN TO VIEW  
PRODUCT VIDEO

### SERVICE ELECTRIC VEHICLES SAFELY!

The LT35A lift table is designed to service batteries on hybrid and electric vehicles.

**Give your service options a lift!**



**SHOWN:** SL210W-AV with LT35 lift table and RT30 repair table



#### ROTARY SOLUTIONS

To learn more about all of our automotive service and repair solutions or to contact your local distributor, visit us at [www.RotarySolutions.com](http://www.RotarySolutions.com) today.

#### Need assistance or have questions? We're here to help:

800.445.5438 / Sales: [insidesales@rotarysolutions.com](mailto:insidesales@rotarysolutions.com)  
Technical Support: [LD-techsupport@rotarysolutions.com](mailto:LD-techsupport@rotarysolutions.com)

#### ROTARY SOLUTIONS™

2700 Lanier Drive | Madison, IN 47250, U.S.A.

Lit# Rotary.SMARTLIFT AV.Cutsheet.11.01.2024

©2024 VEHICLE SERVICE GROUP™

All Rights Reserved. Unless otherwise indicated, ROTARY SOLUTIONS™, VEHICLE SERVICE GROUP™, DOVER® and all other trademarks are property of Dover Corporation and its affiliates.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.