

ARO16

NEW HIGH CAPACITY OPEN FRONT ALIGNMENT LIFT

UNMATCHED CAPABILITY TO ALIGN AND SERVICE A BROAD RANGE OF VEHICLES




SIMPLE INTUITIVE CONTROL CENTER

- Located at the front column, all functions are within tech reach




Model shown:
ARO16N001RD
with optional ramp extensions

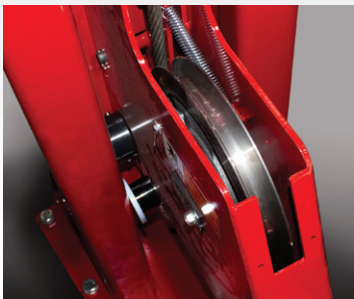

OVERSIZED COLUMNS AND ROLLERS

- Column rollers and open-yoke combination are designed to minimize critical wear and tear resulting in MAXIMUM UPTIME.

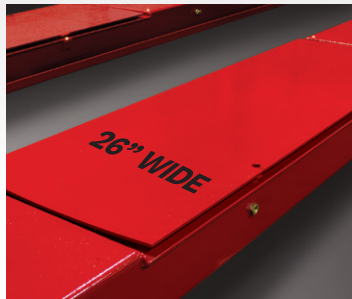

OVERSIZED AIR ACTUATED SLIP PLATES

- Operated from power column
- Flush with runways
- Easy on technician



LIGHT UP YOUR WORKSPACE!

- Integrated LED lighting puts the light where you need it and are out of the tech's way.

OPEN FRONT DESIGN PROVIDES GREATER ACCESS TO VEHICLE COMPONENTS



PERFECT LIFT FOR LAST MILE "INTERNET" DELIVERY VANS!



ACHIEVE MAXIMUM WHEEL ALIGNMENT CAPABILITY

- Allows 3-positions for two heavy duty stainless steel turning radius gauges

AVAILABLE IN TWO RUNWAY LENGTHS

Standard Runway Length (L): 209"

Four-Wheel Alignment Wheelbase Range: 81"-168"
Two-Wheel Alignment Wheelbase Range: Up to 181"
General Service Wheelbase: 194"

Extended Runway Length (EL): 231"

Four-Wheel Alignment Wheelbase Range: 81"-168"
Two-Wheel Alignment Wheelbase Range: Up to 204"
General Service Wheelbase: 217"

ROTARY

BY ROTARY SOLUTIONS



ARO16 4 POST LIFTS

FEATURES:

- 9K lbs. capacity rear and 7K lbs. capacity front rolling jacks
- Dual function Sentinel Lock™ system
- Internal airline with air filter/regulator/lubricator
- All Gold Certified

L MODEL EL MODEL	ARO16N001 ARO16N002
Lift Capacity	16,000 lbs.
Rise*	79"
Width Overall BASEPLATE TO BASEPLATE	140"
Length Overall WITH RAMPS	267 3/8" L Model 290 1/8" EL Model
Length Between Columns	195" L Model 217 3/4" EL Model
Ramp Length	41"
Runway Platform Width	26"
Minimum Runway Height	8"
Width Between Runways	40"
Width Between Columns	117"
Overall Height	107 3/8"
Min. Bay Size	15' x 26' L Model 15' x 28' EL Model
Motor / Voltage	208 - 230V
Time of Full Rise	80 seconds

*Rise measures floor to top of runway at full stroke.
Lift colors are Blue and Red

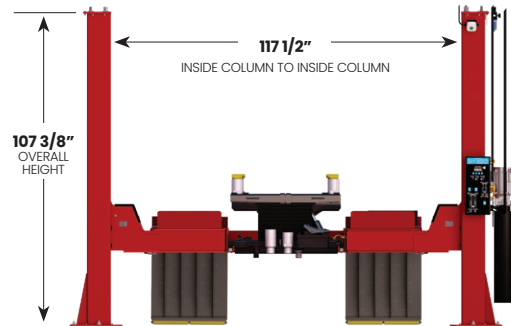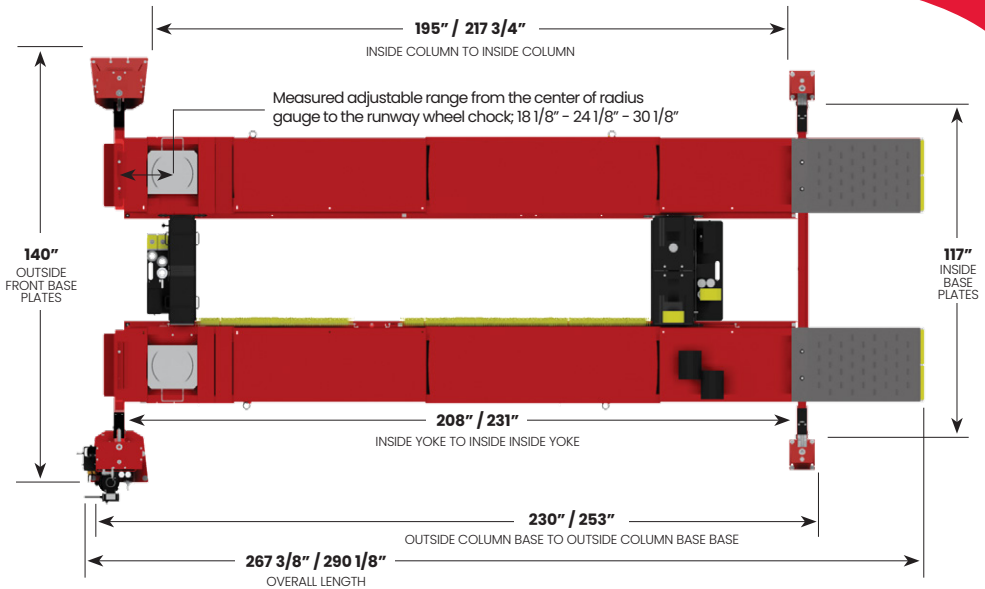

OPTIONAL LIFT ACCESSORIES

Ramp Kits allow for drive-thru capability
• Includes two ramps and hardware

MW-200 / MW-500 Air Operated Tire and Wheel Lifts
200 lbs. and 500 lbs. capacities
• Includes air hose and air tool connection

SPOTLINE™ Laser Kit
Motion activated laser helps center vehicles in bays quickly and accurately

TECH LIGHT™ Line Light R Hand Lamp
Rechargeable LED inspection lamp with top spot light

Oil Drain Pans
• Includes splash guard, drain valve and dust cap

Removable Work Steps with slots on sides of runways

AIR OPERATED ROLLING JACKS

A 7,000 lbs. capacity front jack and a 9,000 lbs. capacity rear jack come standard. Accommodate the widest vehicle range (Class 1 through Class 4) in this lift segment.

When fully lowered, rolling jacks have a sub-2.5" height above runways creating a low drive-over height for cars and trucks.*

*Measured height without adapters



7,000 LBS. CAPACITY FRONT JACK

Standard with frame-engaging adapters, extensions and polymer pads



9,000 LBS. CAPACITY REAR JACK



ROTARY SOLUTIONS

To learn more about all of our automotive service and repair solutions or to contact your local distributor, visit us at www.RotarySolutions.com today.

Need assistance or have questions? We're here to help:
800.445.5438 / Sales: insidesales@rotarysolutions.com
Technical Support: HD-techsupport@rotarysolutions.com

ROTARY SOLUTIONS™

2700 Lanier Drive | Madison, IN 47250, U.S.A.

Lit# Rotary.ARO16.Cutsheet.11.01.2024

©2024 VEHICLE SERVICE GROUP™
All Rights Reserved. Unless otherwise indicated, ROTARY SOLUTIONS™, VEHICLE SERVICE GROUP™, DOVER® and all other trademarks are property of Dover Corporation and its affiliates.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.

