

R1065

MOBILE TABLET ALIGNER

WIRELESS COMPUTER FREE SYSTEM

NO MINIMUM BAY SIZE REQUIRED – MOVE FROM BAY TO BAY WITH EASE

NO REQUIRED SOFTWARE UPDATES



HANDHELD TABLET OPERATES WITH WIFI CONNECTION

- Tablet connects to measuring heads via Bluetooth
- View live readings while making adjustments

MAKE ASSESSMENTS, ADJUST READINGS, AND COLLECT VEHICLE DATA ANYWHERE IN THE BAY.

STANDARD MAGNET KIT ALLOWS TABLET POSITIONING TO THE CART, DIRECTLY TO A LIFT OR VEHICLE.



STATE-OF-THE-ART WIRELESS MEASURING HEADS

- No cables or interruptions during alignment process
- Vehicle axle characteristics are measured by 4 CCD measuring heads
- Each head includes 2 CCD cameras
- Measuring heads charge while stored on cart



SENSOR KEYPAD

- GREEN LED signals when charging
- RED LED signals when unit is on



ACCURATE 2 STEP RUN OUT PROCESS

- Tells the operator when to stop, and roll forward during the process
- Eliminates any guessing

PERSONALIZED ALIGNMENT REPORTS

- Emailed directly to customer
- Print report to a local WIFI printer

AFFORDABLE TOWER-FREE SYSTEM PROVIDES THE ULTIMATE USE OF SHOP SPACE



Bluetooth®
Bluetooth transmission between measuring heads and control unit.



Position portable aligner cart anywhere in the bay for maximum shop convenience.



ANIMATED INSTRUCTIONS AND GRAPHICS GUIDE THE ALIGNMENT PROCESS

- INCLUDES Spoiler Program for lowered vehicles
- Automatically measures sport and tuned car bodies
- Easy alignment display with animated adjustments
- Report technical vehicle data, 3D run-out info



WATCH & LEARN!

Scan code to watch product videos.

ROTARY
 BY ROTARY SOLUTIONS

R1065
 MOBILE TABLET ALIGNER

FEATURES


- Fast installation and set up
- Portable – can be used in multiple bays
- Operate on any runway lift with alignment kit
- Mobile cart with built-in sensor chargers
 - long lasting batteries work all day
- 2 front and 2 rear measuring heads with 2 CCD cameras each
- 4 point tire clamps (2 pair)

TOTAL MEASURING RANGE

	ACCURACY	MEASURING RANGE	TOTAL RANGE
FRONT AXLE			
Total toe	+ / - 2'	+ / - 2"	+ / - 20"x2
Partial toe	+ / - 1'	+ / - 1"	+ / - 20"
Set-back	+ / - 2'	+ / - 2"	+ / - 5"
Camber	+ / - 2'	+ / - 3"	+ / - 10"
Caster	+ / - 5'	+ / - 10"	+ / - 18"
King pin	+ / - 5'	+ / - 10"	+ / - 18"
REAR AXLE			
Total toe	+ / - 2'	+ / - 2"	+ / - 20"x2
Partial toe	+ / - 1'	+ / - 1"	+ / - 20"
Set-back	+ / - 2'	+ / - 2"	+ / - 5"
Camber	+ / - 2'	+ / - 3"	+ / - 10"
Thrust angle	+ / - 2'	+ / - 2"	+ / - 5"
Power supply	110v / 1Ø / 60 Hz		

STANDARD EQUIPMENT

- Mobile storage cart
- 10" Android tablet
- 8 CCD camera system
 - 4 sensors with 2 CCD cameras
- 4 STDA33EU wheel clamps
- 1 brake pedal depressor
- 1 steering wheel lock
- 3-Year parts warranty
- 1-Year labor warranty

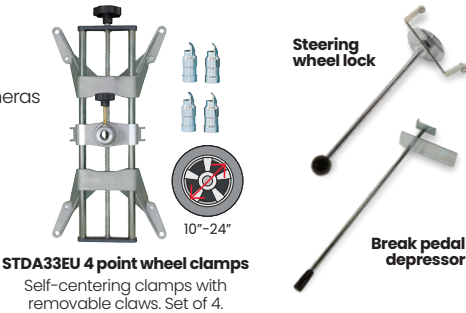

OPTIONAL ACCESSORIES*



* Optional wheel clamps shown are purchased as an option and cannot be substituted for standard STDA33EU clamps.

ROTARY WHEEL SERVICE EQUIPMENT carries a 3 year warranty. See website for details.



To learn more about all of our automotive service and repair solutions or to contact your local distributor, visit us at www.RotarySolutions.com today.

Need assistance or have questions? We're here to help:
 800.445.5438 / Sales: insidesales@rotarysolutions.com
 Technical Support: WS-techsupport@rotarysolutions.com

ROTARY SOLUTIONS™
 2700 Lanier Drive | Madison, IN 47250, U.S.A.

Lit# Rotary.R1065.Cutsheet.10.01.2024

©2024 VEHICLE SERVICE GROUP™
 All Rights Reserved. Unless otherwise indicated, ROTARY SOLUTIONS™, VEHICLE SERVICE GROUP™, DOVER® and all other trademarks are property of Dover Corporation and its affiliates.
 Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.