


ENGINEERED TO PERFORM. BUILT TO LAST.





- 78 3/4" rise height
- · Heavy duty high-performance cable and sheaves system
- · Patented articulating shaft design ensures even roller loading
- · Easy to use single point lift operation with air operated lock release
- Multi-position lock components allow lift to be level at any lock position
- Self-chocking 41" louvered approach ramps with protective rollers
- Durable powder coat finish

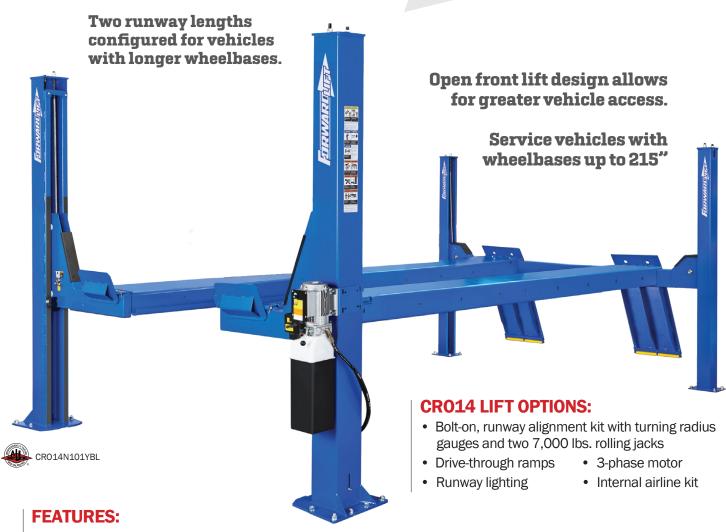

Forward Lift CR014 meets the highest industry safety and performance standards. Your assurance of certification is the gold ALI/ETL certified label.



996 Industrial Drive Madison, IN 47250

Phone: 800.423.1722 Fax: 812.273.7329



*I ifts available in blue and red Specifications subject to change without notice or liability.

Minimum Bay Size

CR014N101YBL/RD*

CR014N102YBL/RD* 14,000 lbs. (6350kg)

182-1/2" (4635mm)

215" (5461mm)

253" (6426mm)

286" (7264mm)

140-1/2" (3567mm)

194-3/4" (4946mm)

227-3/4" (5784mm)

15' x 26' (4572mm x 7925mm)

15' x 28' (4572mm x 8534mm)

78-3/4" (2000mm)

SPECIFICATIONS

Maximum Wheelbase

Length between Columns

Capacity

Rise

Width Inside Columns 116-1/4" (2953mm)

Runway width 20" (508mm)

Rise Time 79 seconds

Motor 2HP

Runway Height 7" (178mm) Width Between Runways 43" (1092mm)

Overall height 109-1/16" (2770mm)

Overall length

Overall width