



DP15

HEAVY DUTY TWO POST LIFT
15,000 lbs. Capacity



FEATURES:

Symmetrical column design

2-stage front and rear arms

Three height configuration models for most ceiling heights

Top mounted direct pull technology

- Cylinder rod concealed inside carriage
- Overhead cable equalization
- Single point lock release
- Spring operated arm restraints
- Includes adapter storage
- Durable powder-coated finish
- ALI certified


INCLUDES THREADED TRUCK ADAPTERS AND (4 each) 5" and 10" ADAPTER EXTENSIONS



2-STAGE FRONT AND REAR ARMS

Designed with heavy-duty reinforced gusseting

- 2-stage arms extend and retract from 61" to 38"
- 5 1/2" minimum adapter height from floor

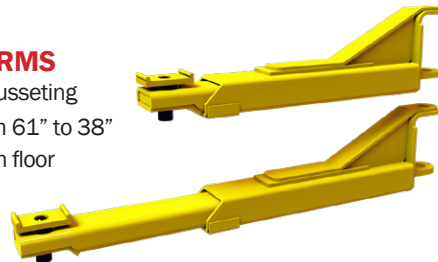

SPECIFICATIONS

BL=Blue Lift / RD= Red Lift

THREE OVERALL HEIGHT OPTIONS / MODELS

DP15N000BL / RD	12' 10 3/4" Low Ceiling
DP15N001BL / RD	14' 7" Standard Height
DP15N002BL / RD	16' 7" Extended Height
Capacity	15,000 lbs.
Rise with 10" Adapter Extension	83 1/4"
Height to Shut-Off	147 1/4" Low Ceiling 167 1/4" Standard Height 191 1/4" Extended Height
Overall Width	12' 10 3/8"
Inside Columns	119 5/8"
Drive-Thru	108 1/4"
Arm Reach (Min/Max)	38" / 61"
Minimum Adapter Height	5 1/2"
Voltage/Amps	208V - 230V, 17 amps
Motor/Phase	2HP / 1Ph

MINIMUM REQUIRED CEILING HEIGHT

DP15N000BL / RD	12' 11 3/4" Low Ceiling
DP15N001BL / RD	14' 8" Standard Height
DP15N002BL / RD	16' 8" Extended Height

Specifications subject to change without notice or liability
Lift colors are available in blue (BL) and red (RD)



FWD DP15N002BL
Extended Height Lift



ALI GOLD CERTIFIED

Forward Lift DP15 meets the highest industry safety and performance standards. Your assurance of certification is the gold ALI/ETL certified label.



996 Industrial Drive
Madison, IN 47250

Phone: 800.423.1722
Fax: 812.273.7329

www.forwardlift.com



Lit# Forward DP15 CUTSHEET.2023.07 ©2023 Vehicle Service Group® All rights reserved.

Unless otherwise indicated, Forward Lift, Vehicle Service Group®, Dover and all other trademarks are property of Dover Corporation and its affiliates.