


Rivet Gun

Easy to use, lightweight
and highly efficient

This riveting tool allows your technicians to complete all common riveting operations in thin sheet metal structures in record time.

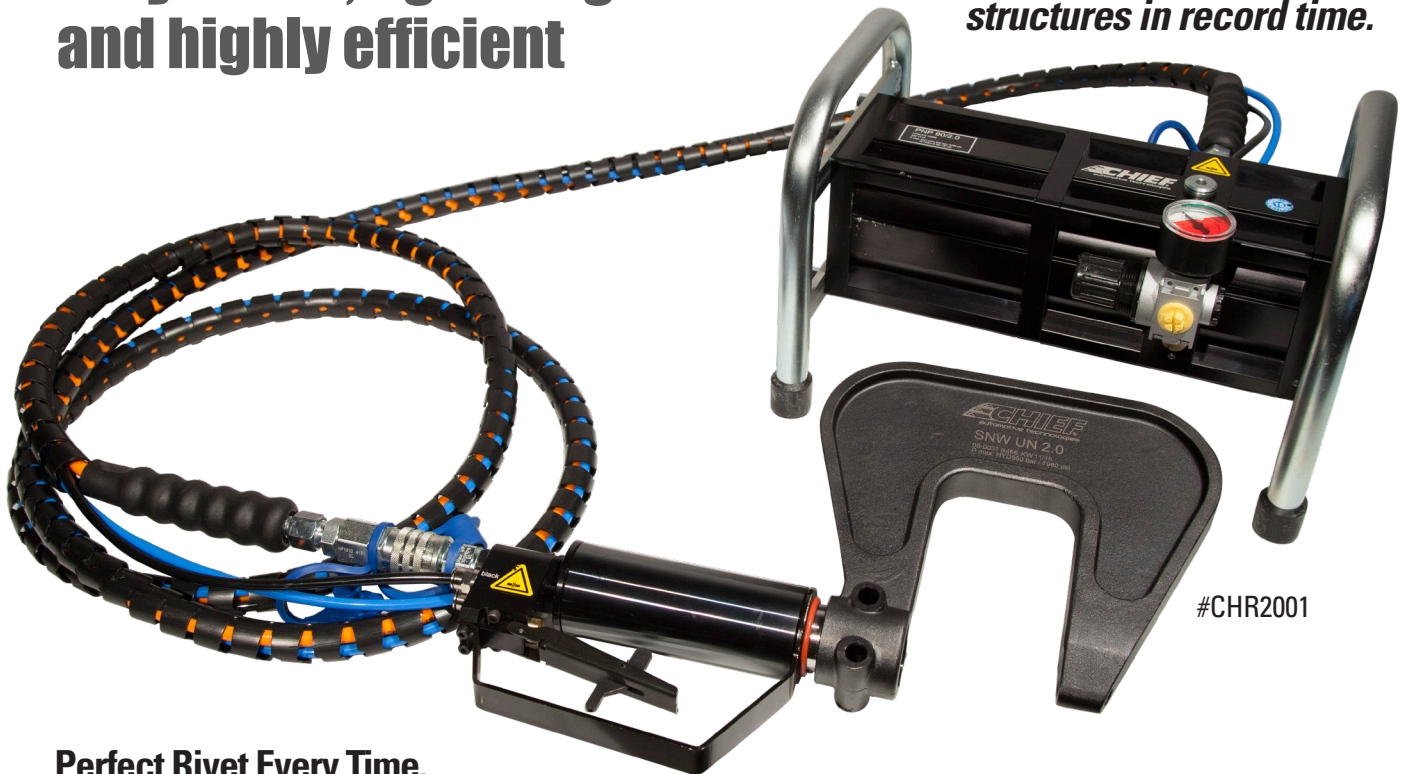

Perfect Rivet Every Time.

Chief Rivet Guns allow you to quickly restore cars, trucks and heavy duty vehicles back to factory specifications with a professional and seamless finish. With durable construction, a variety of attachments the rivet guns can handle any job you throw at them.

Specifically developed for riveting sheet metal in the autobody repair field, this rivet gun is a pneumatic-hydraulic system which easily adapts various attachments for different applications. The hydraulic pump is pneumatically driven. The pressure intensifier, with a ratio of 100:1, delivers hydraulic output pressure of 8702 psi (600 bar) with input pressure of only 87 psi (6 bar). When the equipment's preset final pressure is reached, the pump stops and maintains constant pressure, using a pneumatically controlled pressure regulator.

Features, Advantages, Benefits

Universal - allows for attachments for various applications:

Riveting / Punching / Pressing Out / Calibrating

Highly efficient - pressure ratio of 100:1

Precise control over strength of impact

Sturdy construction with low maintenance

The basic tool kit contains the pneumo-hydraulic pressure intensifier a hydraulic gun, an NB 40 rivet clamp and a fully equipped UN 2.0 Riveting Tool Kit.



BASIC RIVET GUN KIT



**Rivet Clamp
NB 40**



**Hydraulic Gun
HP 35 UN**



**Pressure Intensifier
PNP90**



**Riveting Tool Kit
Locking Bolts**



Case

1x Pressure intensifier PNP90

1x Hydraulic gun HP 35 Un

1x Rivet clamp NB 40

- Length x Width x Height - 4-11/64 x 1-49/64 x 6-17/64" (106 x 45 x 159mm)
- Weight - 3.4 lbs. (1.5 kg)
- Clamp Opening - 3-5/32" (80mm)
- Opening Depth - 1-37/64" (40mm)

1x Riveting tool kit RIVKIT - UN 2.0

- Setting / closed head 1/8" (3mm) rivet
- Setting / closed head 13/64" (5mm) rivet
- Setting / closed head, flow form rivet
- Punch and calibration mandrel / die
- Extraction mandrel / die
- Replacement elastomer rings
- Set of mounting tools
- Spacing adaptor

2x Locking bolts

Optional Accessories



Rivet Clamp NB 115 #CHR2204



Rivet Clamp NB 230 #CHR2203

Specifications - Rivet Gun

Technical data

Pump PNP90 UN 2.0

Length x Width x Height (without hoses, including handle)	12-63/64 x 9-1/16 x 8-25/64" (330 x 230 x 213mm)
Weight (without hoses)	17.1 lbs. (8kg)
Max input pressure	6 bar / 87 PSI
Max operating pressure	600 bar / 8702 PSI

Hydraulic gun HP 35 UN

Length x Width x Height (including handle)	9-11/16 x 1-31/32 x 4-9/64" (246 x 50 x 105mm)
Max operating pressure	600 bar / 8702 PSI
Travel	19/32" (15mm)

Specifications / Rivet Gun Accessories

RIVET CLAMP NB 115	8-25/64 x 1-47/64 x 8-21/32" (213 x 44 x 220mm)
Length* x Width x Height	
Weight*	6.9 lbs. (3kg)
Clamp Opening	3-5/32" (80mm)
Opening Depth	4-17/32" (115mm)

RIVET CLAMP NB 230	14-21/64 x 1-49/64 x 13-45/64" (364 x 45 x 348mm)
Length* x Width x Height	
Weight*	20.15 lbs. (9.5kg)
Clamp Opening	5-33/64" (140mm)
Opening Depth	9-1/16" (230mm)
Length spacer	3-5/64" (78mm)



1-800-445-9262

www.chiefautomotive.com

Improve the speed, quality and profitability of every repair you make. Contact your local distributor or call Chief Automotive Technologies today.



©2018 VEHICLE SERVICE GROUPSM

Printed in the U.S.A. All Rights Reserved. Unless otherwise indicated, CHIEF AUTOMOTIVE TECHNOLOGIES, VEHICLE SERVICE GROUPSM, DOVER and all other trademarks are property of the Dover Corporation and its affiliates. Chief Automotive Technologies reserves the right to alter product specifications and/or package components without notice, excluding changes to components subject to FCC & IC regulations.

RIVET GUN 03/18