



Model Shown: #EL900012

MI200T SPOT WELDER

Chief's New MI200T Spot Welder is the ideal solution for all high strength steel body repairs.

- Simple to use LCD user interface
- Ergonomic and lightweight pliers
- Up to 14500A output power at 40% less input power*
- High duty cycle without waiting for cool down
- Liquid cooled to the tips
- Nearly 20' of welding cable provides increased reach
- C-pliers with multiple size arms available

*Power usage compared to standard cable pliers welders

Elektron TrueAutomode:

- Detects and adjusts welding parameters
- Logs data for each repair
- Provides feed back on the results of every weld

Every MI200T comes ready to weld with this standard equipment:



Insulated C1 Arm



360° Gyro C Arm



Overhead Balancer



Starter Box of Caps



Arm Mounting Bracket

Performance Specifications:

Power Supply	208-240V (3 phase)
Fuse	40 A slow blowing
Frequency	50/60 Hz
Supply Power	14 kVA (80 kVA max)
Nominal Power by 50% ED	20kVA
Welding Current Max.	14,500 A DC (at 230V)
Electrode Force	550 daN with 8 bars (1236 lbf with 116 PSI)
Ambient Temperature	41° to 113° F (5° to 45° C)
Protective System	IP 21
Weight w/o Accessories	Approx. 220 lbs. (100 kg)
Pliers Weight	23.1 lbs. (10.5 kg)
Dimensions H / W / D	36.4" / 25.6" / 31.5" (92.5 x 65 x 80 cm)
Cable Length	Input mains cable: 26' (8m) Weld cable: 20' (6m)
Quantity of Cooling Liquid	8 gallons (30 liters)



1-800-445-9262


www.chiefautomotive.com

Improve the speed, quality and profitability of every repair you make. Contact your local distributor or call Chief Automotive Technologies today.



©2018 VEHICLE SERVICE GROUP™ Printed in the U.S.A. All Rights Reserved. Unless otherwise indicated, CHIEF AUTOMOTIVE TECHNOLOGIES, VEHICLE SERVICE GROUP™, DOVER and all other trademarks are property of the Dover Corporation and its affiliates. Chief reserves the right to alter product specifications and/or package components without notice, excluding changes to components subject to FCC & IC regulations.


C Arm Applications:

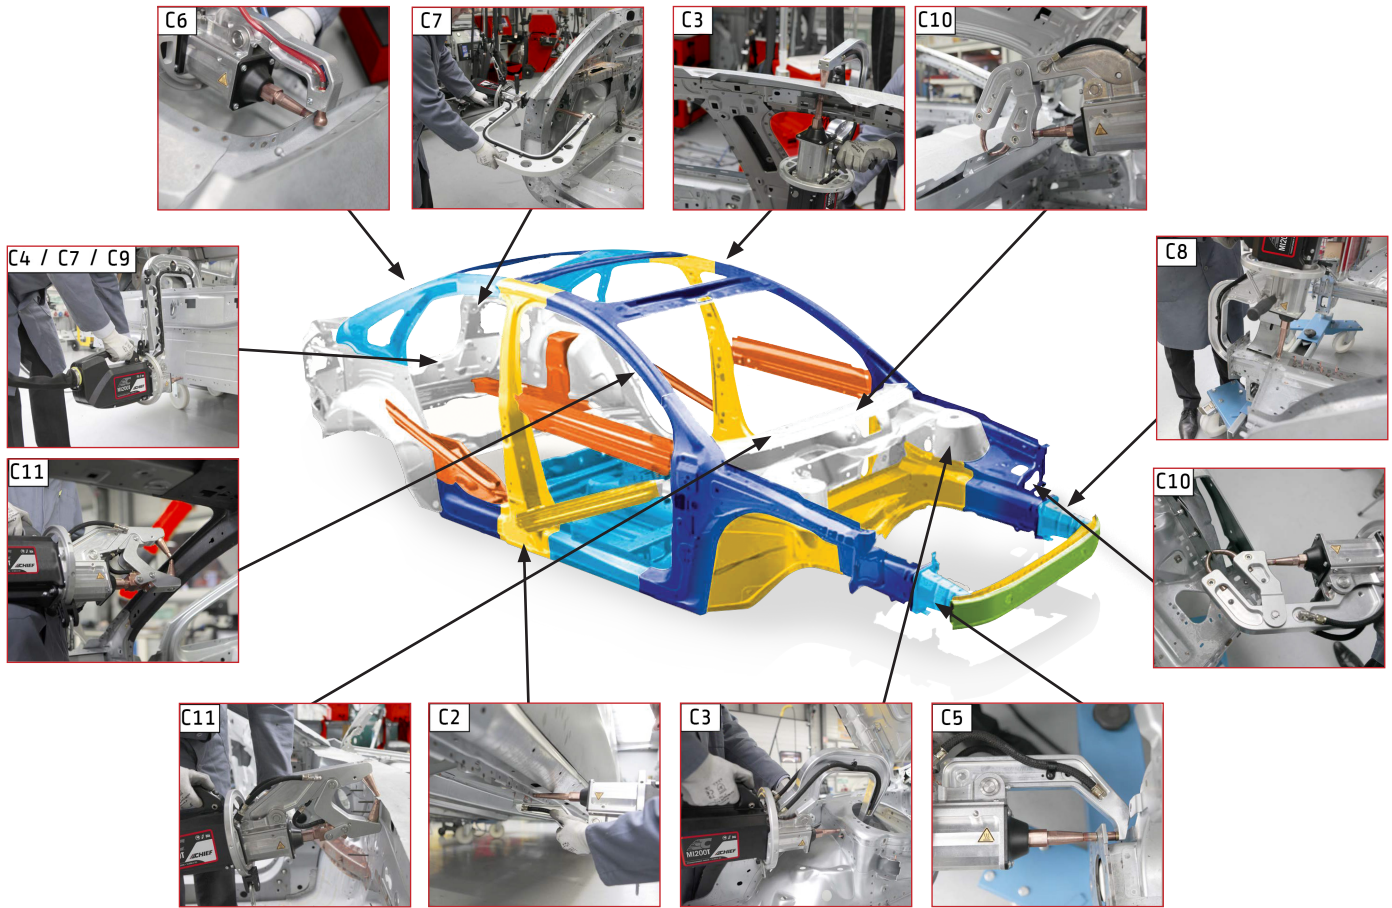


Customize your MI200T with the multiple C Arms available for all of your welding needs*




C1 Arm (CELO19140)
Insulated C1 (CELO21402)




C2 Arm (CELO19133)
Insulated C2 (CELO22386)




C3 Arm (CELO19157)
Insulated C3 (CELO21419)




C4 Arm (CELO19164)
Insulated C4 (CELO21426)




C5 Arm (CELO19294)
Insulated C5 (CELO22393)




C6 Arm (CELO19775)
Insulated C6 (CELO22409)




C7 Arm (CELO20009)
Insulated C7 (CELO21433)



C8 Arm (CELO20016)
Insulated C8 (CELO21440)



Insulated C9 (CELO20078)



C10 Arm (CELO51638)




C11 Arm (CELO53649)



Single Sided Kit (CELO51010)



C2 + Insulated C3 and C4
(CELO21457)



C2 + C3 + C4
(CELO19126)



C2 + C3 + C5 + C6 + Insulated C9
(CELO50044)

For additional accessories visit chiefautomotive.com *All C arms rated 550daN except C6 and C10